

# Роутеры TRENDnet и АКАДО


У провайдера АКАДО есть 2 типа подключения:

1-й тип подключения в квартиру вводится телевизионный кабель и устанавливается кабельный модем (обычно моторолла), при этом подключении необходимо соединить кабельный модем с WAN портом роутера, LAN1 порт роутера соединить с сетевой платой компьютера, затем зайти в настройки роутера. Инструкция о том, как это сделать находится здесь:

<http://downloads.trendnet.ru/!настройки/Настройка IP адреса компьютера для конфигурирования оборудования TRENDnet.doc>

## НАСТРАИВАТЬ РОУТЕР НЕОБХОДИМО С ТОГО КОМПЬЮТЕРА НА КОТОРОМ В ДАННЫЙ МОМЕНТ ПОДКЛЮЧЕН ИНТЕРНЕТ

1) Заходим в меню WAN роутера и делаем следующие настройки

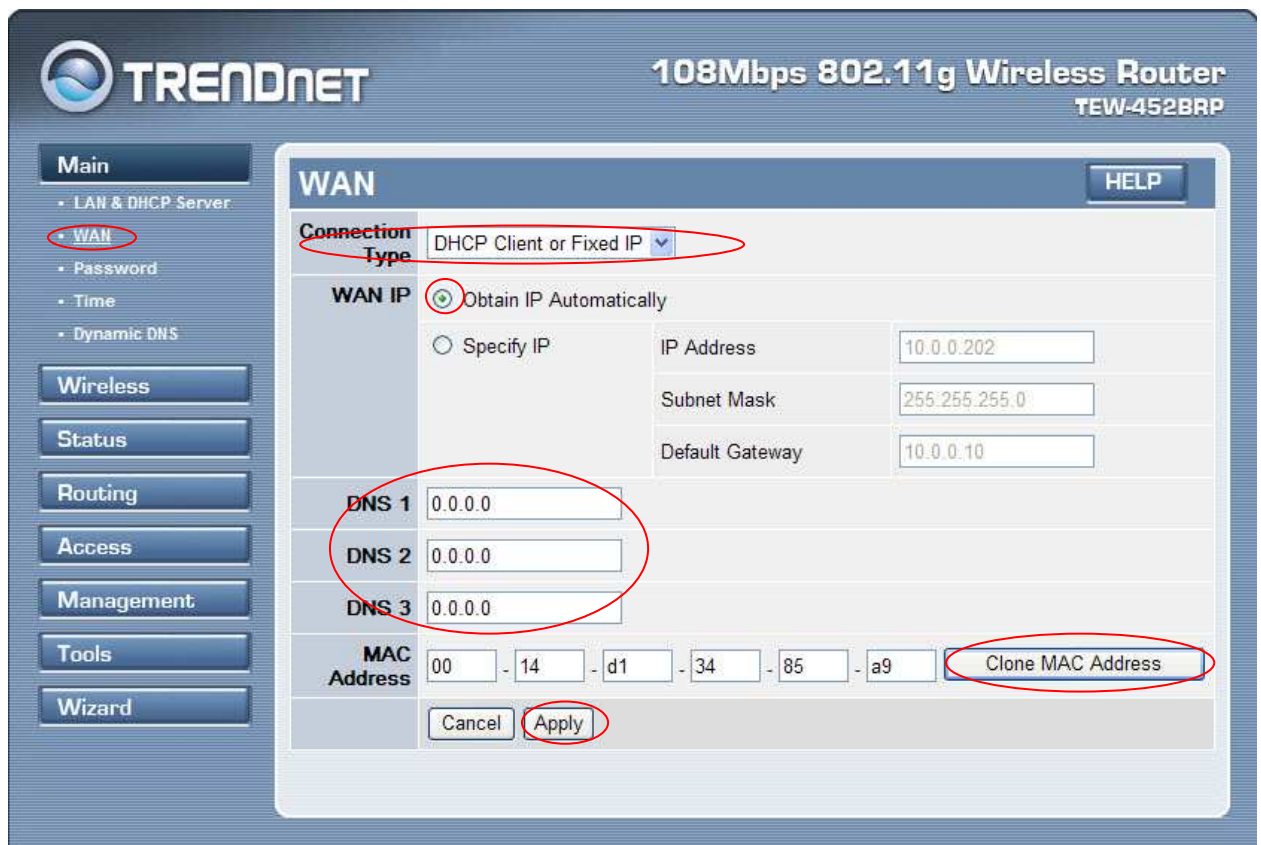

2) Нажимаем Clone MAC Address затем сохраняем настройки кнопкой Apply

На этом настройка роутера закончена

2-й тип подключения провайдер заводит в помещение компьютерный сетевой кабель и дает настройки IP адрес, маску сети(subnet mask), шлюз(default gateway), DNS

## НАСТРАИВАТЬ РОУТЕР НЕОБХОДИМО С ТОГО КОМПЬЮТЕРА НА КОТОРОМ В ДАННЫЙ МОМЕНТ ПОДКЛЮЧЕН ИНТЕРНЕТ

1) Заходим в меню WAN роутера и делаем следующие настройки

The screenshot shows the WAN configuration interface for a TrendNet 108Mbps 802.11g Wireless Router (TEW-452BRP). The interface is divided into a left sidebar and a main configuration area. The sidebar includes a 'Main' menu with options like LAN & DHCP Server, WAN, Password, Time, and Dynamic DNS. Below this are buttons for Wireless, Status, Routing, Access, Management, Tools, and Wizard. The main configuration area is titled 'WAN' and contains the following settings:

- Connection Type:** A dropdown menu set to 'DHCP Client or Fixed IP'.
- WAN IP:** Two radio buttons: 'Obtain IP Automatically' (unselected) and 'Specify IP' (selected).
- IP Address:** A text box containing '10.0.0.202'.
- Subnet Mask:** A text box containing '255.255.255.0'.
- Default Gateway:** A text box containing '10.0.0.10'.
- DNS 1:** A text box containing '10.0.0.10'.
- DNS 2:** A text box containing '0.0.0.0'.
- DNS 3:** A text box containing '0.0.0.0'.
- MAC Address:** A series of text boxes containing '00', '14', 'd1', '34', '85', and 'a9'. To the right of these boxes is a button labeled 'Clone MAC Address'.
- Buttons:** 'Cancel' and 'Apply' buttons are located at the bottom of the configuration area.

2) Нажимаем Clone MAC Address затем сохраняем настройки кнопкой Apply

На этом настройка роутера закончена